



PPRV-05


A P P A

T P A

T A A T

P A A P A

T

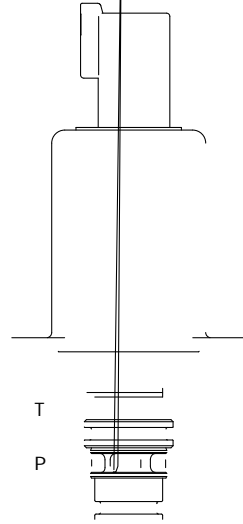


- 
- 
-

	0.235Kg
MTTF <sub>d</sub>	150
	-30-80


	P <sub>p</sub> = 60bar		
	P <sub>T</sub> = 30bar		
	P <sub>A</sub> = 32bar		
	PWM	180Hz	<4%
		NAS1638 9	ISO 4406 20/18/15
	DIN 51524		
	-30-105		
	< 70mL/min		
	< 300mL/min		
	140µm P		

	12V	24V	24V
	1500mA	1300mA	750mA
20	4.8	9	24
	PWM 130-200Hz		
	DT04-2P Deutsch		
	IP6K 6/IPX9K		
	<40ms		
	<40ms		

P-I PPRV-05-L

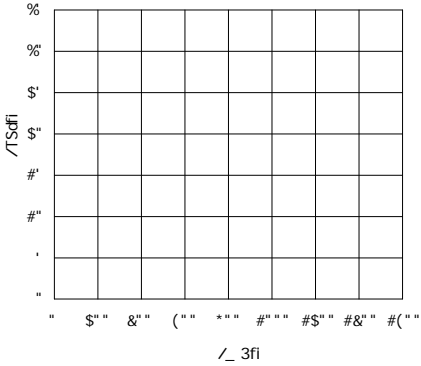

P-I PPRV-05-S

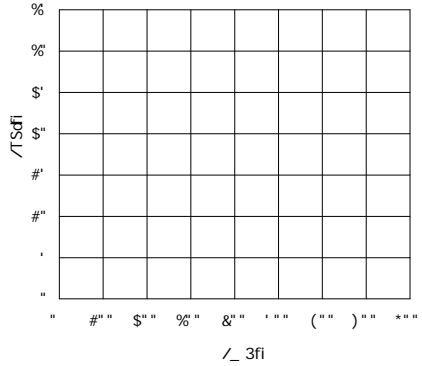

P A

#\$  
 #"  
 \*  
 (  
 &  
 \$  
 "  
 " \$ & ( \* #" #S #& #( #\*

A T

#\$  
 #"  
 \*  
 (  
 &  
 \$  
 "  
 " \$ & ( \* #" #S #& #( #\*



02

02

